


PRODUCT PROFILE

AC Input, Multiple Outputs, Telecomms PSU

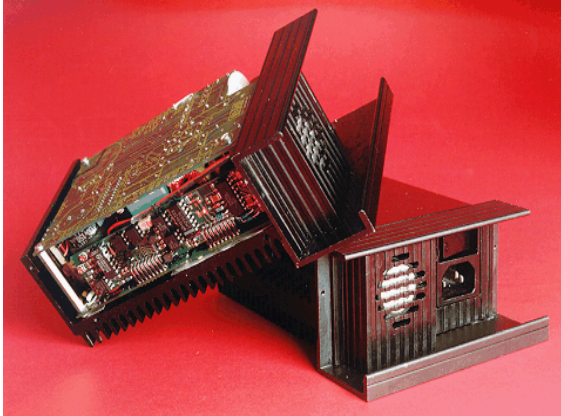

- **High Reliability.**
- **Lightweight.**
- **Fan Cooled.**
- **Harsh Environment.**

Outstanding Quality, Value and Customer Service

GENERAL SPECIFICATION

- ◆ 85 V AC ~ 270 V AC @ 45 ~ 65 Hz Input.
- ◆ Multiple Outputs: +5 V DC @ 3A, 5 V DC @ 3A (Isolated), -9 V DC @ 15A, +9 V DC @ 15A .
- ◆ Operating Temperature Range 0°C to +65°C.
- ◆ Output Power: 300W.
- ◆ Power Factor 0.99 ACTIVE PFC.
- ◆ Weight 1.5Kg.
- ◆ Input Filter VDE / FCC Class ' B ' .
- ◆ Through-Hole Technology utilised.
- ◆ Designed to Harsh Environments, LV & EMC Spec.
- ◆ Custom In-house Design - Mechanical, PCB, Electrical & Electronic.
- ◆ Dimensions 180 x 100 x 70 (mm).

Note: All data is subject to change, and our Technical Sales Department should be consulted regarding any specific requirements.

XCEL Power Systems Ltd.

Brunswick Rd, Cobbs Wood, Ashford, Kent, UK. TN23 1EH
Tel +44 (0) 1233 623404 Fax +44 (0) 1233 641777
Email:sales@xcelpower.demon.co.uk
Visit our website: www.xcelpower.com

ISO 9001 Accredited

Other / Comms