


PRODUCT PROFILE

Avionics Head-Up Display PSU

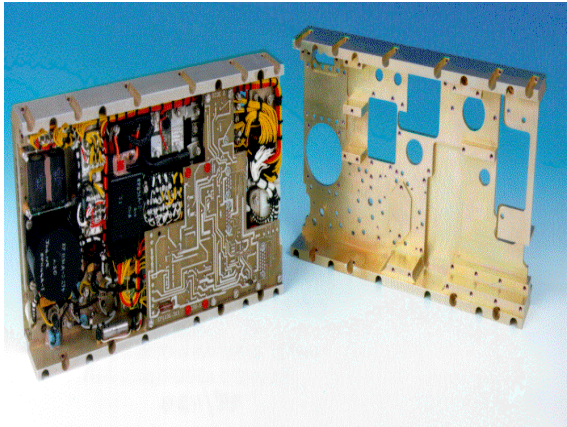

- **Multi-card solution.**
- **Efficiency >65%.**
- **Control & Monitoring Functionality.**
- **BITE Capability.**

Outstanding Quality, Value and Customer Service

Airborne

GENERAL SPECIFICATION

- ◆ 115 V AC 3-Phase @ 400Hz or 28 V DC Aircraft Input.
- ◆ Multiple Outputs ranging from +5V, 8.5V, $\pm 15V$, ± 17.5 , 30V, -120V to +70V.
- ◆ Operating Temperature Range -54°C to +55°C.
- ◆ Input Protection (MIL-STD 704D).
- ◆ Efficiency >65%.
- ◆ Weight 4.75Kg.
- ◆ Output Power: 375W .
- ◆ Through-hole Technology utilised.
- ◆ Designed to meet High Vibration Levels.
- ◆ Custom In-house Design - Mechanical, PCB, Electrical & Electronic.
- ◆ Dimensions: 286 x 171 x 62 (mm).

Note: All data is subject to change, and our Technical Sales Department should be consulted regarding any specific requirements.

XCEL Power Systems Ltd.

Brunswick Rd, Cobbs Wood, Ashford, Kent, UK. TN23 1EH
Tel: +44 (0) 1233 623404 Fax: +44 (0) 1233 641777
Email: sales@xcelpower.demon.co.uk
Visit our website: www.xcelpower.com

ISO 9001 Accredited