


## PRODUCT PROFILE

### Main Battle Tank Power Supply

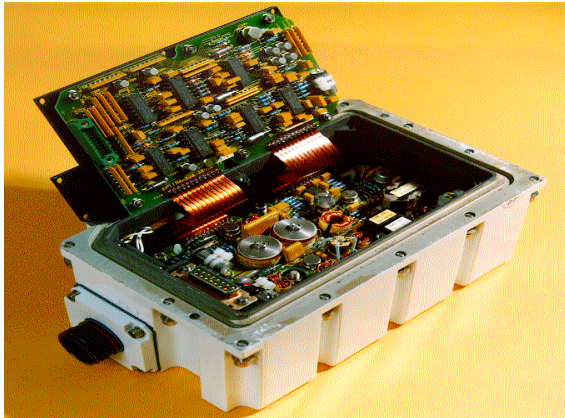

- **Lightweight.**
- **Efficiency >67%.**
- **High Reliability.**
- **Multiple PCB Design.**

Outstanding Quality, Value and Customer Service

### GENERAL SPECIFICATION

- ◆ 28 V DC Input.
- ◆ Dual Outputs +5V @ 3A, +24V @ 6A or 9A.
- ◆ Operating Temperature Range -30°C to +55°C.
- ◆ Ripple: <2% pk - pk.
- ◆ Efficiency >67%.
- ◆ Weight <2Kg.
- ◆ Through-hole Technology utilised.
- ◆ Designed for tracked vehicle vibration levels.
- ◆ Custom In-house Design - Mechanical, PCB, Electrical & Electronic.
- ◆ Dimensions: 220 x 120 x 85 (mm).

Note: All data is subject to change, and our Technical Sales Department should be consulted regarding any specific requirements

#### **XCEL Power Systems Ltd.**

Brunswick Rd, Cobbs Wood, Ashford, Kent, UK. TN23 1EH  
Tel +44 (0) 1233 623404 Fax +44 (0) 1233 641777  
Email:sales@xcelpower.demon.co.uk  
Visit our website: www.xcelpower.com

ISO 9001 Accredited

Land Based