


## PRODUCT PROFILE

### Thermal Imaging Power Supply

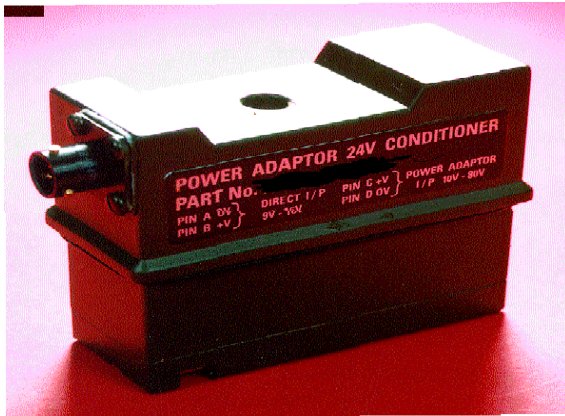

- **Lightweight.**
- **Single Card Solution.**
- **Small Space Envelope.**
- **High Reliability.**

Outstanding Quality, Value and Customer Service

### GENERAL SPECIFICATION

- ◆ 12 V DC ~ 80 V DC Input (MIL-STD 1276), 15 V DC Nominal Battery.
- ◆ Output Voltage +9V DC ~ +12V DC.
- ◆ Operating Temperature Range -20°C to +55°C.
- ◆ Noise & Ripple <50mV pk - pk.
- ◆ Efficiency >65%.
- ◆ Weight <250g.
- ◆ Output Power 4W ~ 20W.
- ◆ Through-Hole Technology utilised.
- ◆ Custom In-house Design - Mechanical, PCB, Electrical & Electronic.
- ◆ Dimensions: 91 x 41 x 75 (mm).

Note: All data is subject to change, and our Technical Sales Department should be consulted regarding any specific requirements

#### **XCEL Power Systems Ltd.**

Brunswick Rd, Cobbs Wood, Ashford, Kent, UK. TN23 1EH  
Tel +44 (0) 1233 623404 Fax +44 (0) 1233 641777  
Email:sales@xcelpower.demon.co.uk  
Visit our website: www.xcelpower.com

ISO 9001 Accredited