


**PRODUCT PROFILE**

**LV, Multiple Outputs, Military Helmet Display PSU**

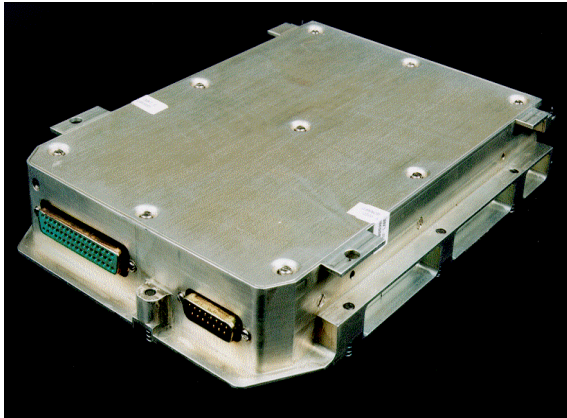

- **Hold-up of 6mS.**
- **Efficiency >75%.**
- **Short Circuit Protection.**
- **Over Voltage Protection.**

*Outstanding Quality, Value and Customer Service*

Airborne

**GENERAL SPECIFICATION**

- ◆ 28 V DC Input (BS 2282).
- ◆ Multiple Outputs +5V @ 6.3A, ±6V @ 0.46A, ±15V @ 0.85A, ±20V @ 1.23A, 28V @ 1.2A, ±35V @ 0.22A.
- ◆ Operating Temperature Range -30°C to +70°C.
- ◆ Short Circuit Protection.
- ◆ Efficiency >75%.
- ◆ Weight 1.2Kg.
- ◆ Hold-up Period 6mS.
- ◆ SM Technology Utilised.
- ◆ Custom In-house Design - Mechanical, PCB, Electrical & Electronic.

Note: All data is subject to change, and our Technical Sales Department should be consulted regarding any specific requirements.

**XCEL Power Systems Ltd.**

Brunswick Rd, Cobbs Wood, Ashford, Kent, UK. TN23 1EH  
Tel: +44 (0) 1233 623404 Fax: +44 (0) 1233 641777  
Email: sales@xcelpower.demon.co.uk  
Visit our website: www.xcelpower.com

ISO 9001 Accredited