


PRODUCT PROFILE

Thermal Imager Custom Power Supply

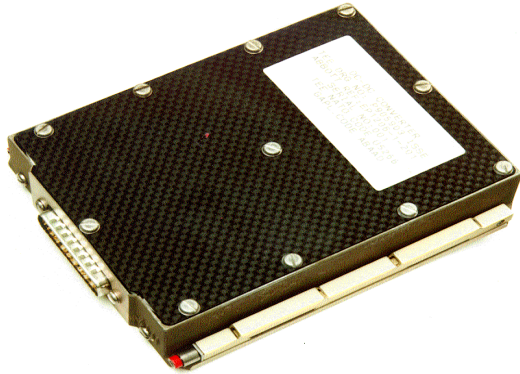

- **Nuclear Circumvention.**
- **Efficiency >74%.**
- **Lightweight.**
- **Single PCB Design.**

Outstanding Quality, Value and Customer Service

GENERAL SPECIFICATION

- ◆ 12 V DC ~ 32V DC Input.
- ◆ Multiple Outputs +5V @ 0.3A, 6.3V @ 1.8A, +8V @ 0.25A, -8V @ 0.2A, +8V (Switched) @ 2.7A.
- ◆ Operating Temperature Range -40°C to +117°C.
- ◆ Nuclear Circumvention.
- ◆ Efficiency >74%.
- ◆ Weight 220g.
- ◆ Isolated HV Output.
- ◆ Composite Construction.
- ◆ Custom In-house Design - Mechanical, PCB, Electrical & Electronic.
- ◆ Dimensions: 70 x 50 x 55 (mm).

Note: All data is subject to change, and our Technical Sales Department should be consulted regarding any specific requirements

XCEL Power Systems Ltd.

Brunswick Rd, Cobbs Wood, Ashford, Kent, UK. TN23 1EH
Tel +44 (0) 1233 623404 Fax +44 (0) 1233 641777
Email:sales@xcelpower.demon.co.uk
Visit our website: www.xcelpower.com

ISO 9001 Accredited

Land Based