


## PRODUCT PROFILE

### LV & HV, Multiple Outputs, Civil Display PSU

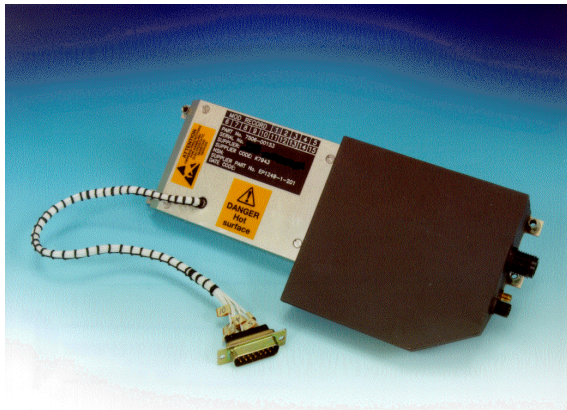

- Synchronisation Functionality.
- SMT - Low Profile.
- Dynamic Focus.
- Isolated HV Output.

Outstanding Quality, Value and Customer Service

Airborne

### GENERAL SPECIFICATION

- ◆ 18 V DC ~ 32 V DC Continuous Input. (28 V DC Conditioned.)
- ◆ Multiple Outputs 18KV @ 250µA, 3 ~ 5.3KV @ 400µA, 0 ~ 300V DC @ 17KHz, 890V @ ±10µA.
- ◆ Operating Temperature Range -15°C to +55°C.
- ◆ Dynamic Focus & Synchronisation Functionality.
- ◆ Output Power 6.5W.
- ◆ Weight 0.9Kg.
- ◆ Ripple <2V pk - pk.
- ◆ Surface Mount Technology utilised.
- ◆ Custom In-house Design - Mechanical, PCB, Electrical & Electronic.
- ◆ Dimensions: 238 x 95 x 43 (mm).

Note: All data is subject to change, and our Technical Sales Department should be consulted regarding any specific requirements.

#### XCEL Power Systems Ltd.

Brunswick Rd, Cobbs Wood, Ashford, Kent, UK. TN23 1EH  
Tel: +44 (0) 1233 623404 Fax: +44 (0) 1233 641777  
Email: sales@xcelpower.demon.co.uk  
Visit our website: www.xcelpower.com

ISO 9001 Accredited