


## SP3146 - Missile Surveillance Radar Power Supply

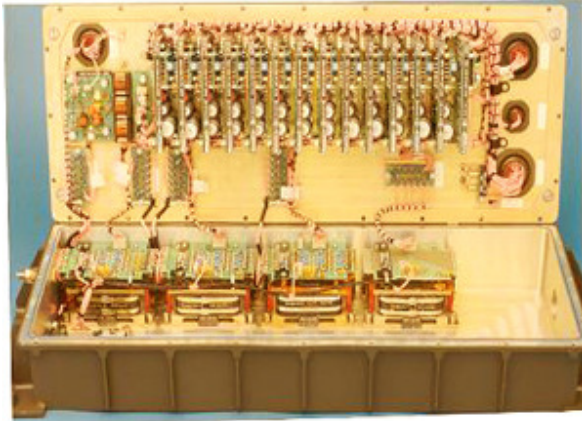

- BITE Capability
- High MTBF
- Nuclear Circumvention
- Isolated Outputs

*Outstanding Quality, Value and Customer Service*

### GENERAL SPECIFICATION

- ◆ 200 V DC 3-Phase Input (DEF STAN 61-5 Part2)
- ◆ Multiple Outputs +5V @ 0.9A, +5V @ 1.6A, +5V @ 4.4A, +9V @ 0.8A, +9V @ 4.9A, -15V @ 1.4A, -15V @ 0.5A, -15V @ 0.4A, -5.2V @ 1.9A, -28V @ 4.4A, +15V @ 0.9A, +15V @ 3.1A
- ◆ Operating Temperature Range -40 °C to +53 °C
- ◆ BITE Capability
- ◆ Full Nuclear Circumvention
- ◆ Through-Hole Technology utilised
- ◆ Custom In-house Design – Mechanical, PCB, Electrical & Electronic
- ◆ Dimensions: 670 x 220 x 120 (mm)