


### SP3181 - Missile Command Radar PSU

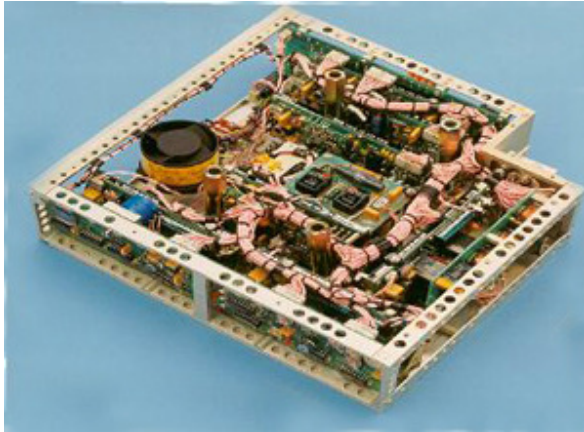

- **Lightweight**
- **BITE Capability**
- **Nuclear Circumvention**
- **O/P Sequencing & Control**

*Outstanding Quality, Value and Customer Service*

#### GENERAL SPECIFICATION

- ◆ 200 V DC 3-Phase Input
- ◆ Multiple Outputs +5V @ 5A, 12V @ 2A, -15V @ 0.3A, +15V @ 0.3A, +26V @ 0.5A, (3A Constant Current up to 5V)
- ◆ Operating Temperature Range -40°C to +85°C
- ◆ Efficiency >74%
- ◆ Weight <4.5Kg
- ◆ Nuclear Circumvention & BITE Capability
- ◆ Full Nuclear Circumvention
- ◆ Through-Hole Technology utilised
- ◆ Custom In-house Design – Mechanical, PCB, Electrical & Electronic
- ◆ Dimensions: 278 x 268 x 85 (mm)