


SP3201 - Mobile Missile Power Supply

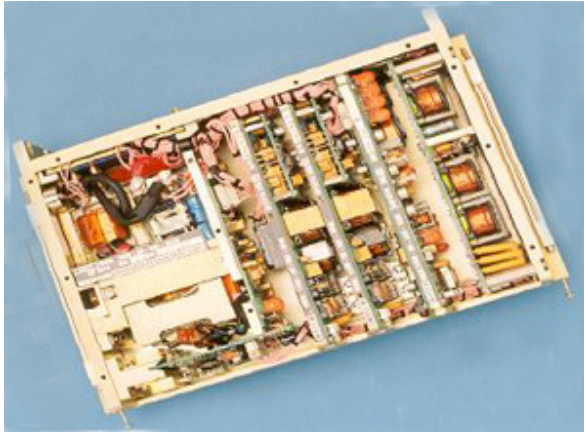

- **Lightweight**
- **BITE Capability**
- **Nuclear Circumvention**
- **O/P Sequencing & Control**

Outstanding Quality, Value and Customer Service

GENERAL SPECIFICATION

- ◆ 200 V DC 3-Phase Input (DEF STAN 61-5 - Part 2)
- ◆ Dual Outputs +5V @ 35A, ±15V @ 2A
- ◆ Operating Temperature Range -40 °C to +50 °C
- ◆ MTBF 750,000hrs
- ◆ Efficiency >70%
- ◆ Weight <3.3Kg
- ◆ Nuclear Circumvention
- ◆ Through-Hole Technology utilised
- ◆ Custom In-house Design – Mechanical, PCB, Electrical & Electronic
- ◆ Dimensions: 249 x 181 x 50 (mm)