


SP3242 - Helicopter Infra Red Sensing Power Supply

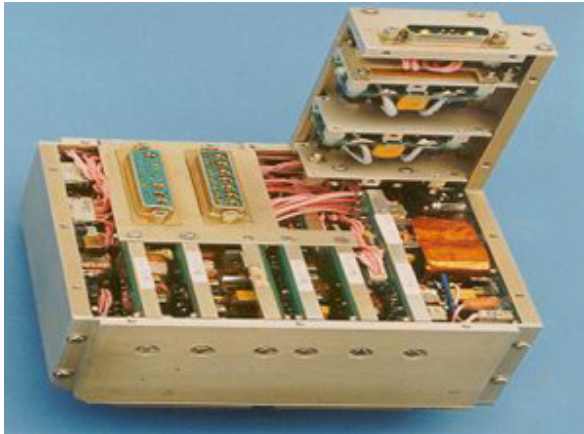

- **BITE Capability**
- **Efficiency >75%**
- **Nuclear Circumvention**
- **Output Sequencing**

Outstanding Quality, Value and Customer Service

GENERAL SPECIFICATION

- ◆ 28 V DC Input
- ◆ Multiple Outputs -5.2V @ 4.2A, +5V @ 5.3A, +5V @ 9.1A, +30V @ 0.74A (10A peak) +50V @ 5A (Non-isolated)
- ◆ Operating Temperature Range -40 °C to +70 °C
- ◆ BITE, Nuclear Circumvention & Output Sequencing Functionality
- ◆ Efficiency >75%
- ◆ Weight: 2.2Kg
- ◆ Through-hole Technology utilised
- ◆ Designed to meet High Vibration Levels
- ◆ Custom In-house Design – Mechanical, PCB, Electrical & Electronic
- ◆ Dimensions: 158 x 141 x 182 (mm)