


## PRODUCT PROFILE

### Missile Surveillance Radar Power Supply

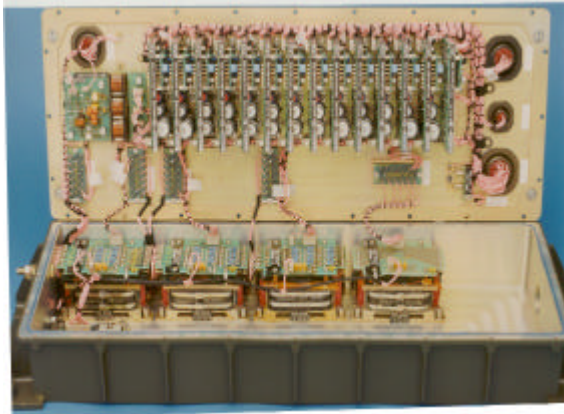

- **BITE Capability.**
- **High MTBF.**
- **Nuclear Circumvention.**
- **Isolated Outputs.**

Outstanding Quality, Value and Customer Service

### GENERAL SPECIFICATION

- ◆ 200 V DC 3-Phase Input (DEF STAN 61-5 Part 2).
- ◆ Multiple Outputs +5V @ 0.9A, +5V @ 1.6A, +5V @ 4.4A, +9V @ 0.8A, +9V @ 4.9A, -15V @ 1.4A, -15V @ 0.5A, -15V @ 0.4A, -5.2V @ 1.9A, -28V @ 4.4A, +15V @ 0.9A, +15V @ 3.1A.
- ◆ Operating Temperature Range -40°C to +53°C.
- ◆ BITE Capability.
- ◆ Full Nuclear Circumvention.
- ◆ Through-hole Technology utilised.
- ◆ Custom In-house Design - Mechanical, PCB, Electrical & Electronic.
- ◆ Dimensions: TBA x TBA x TBA (mm).

Note: All data is subject to change, and our Technical Sales Department should be consulted regarding any specific requirements

#### XCEL Power Systems Ltd.

Brunswick Rd, Cobbs Wood, Ashford, Kent, UK. TN23 1EH  
Tel +44 (0) 1233 623404 Fax +44 (0) 1233 641777  
Email:sales@xcelpower.demon.co.uk  
Visit our website: www.xcelpower.com

ISO 9001 Accredited

Land Based