


PRODUCT PROFILE

Missile Command Radar PSU

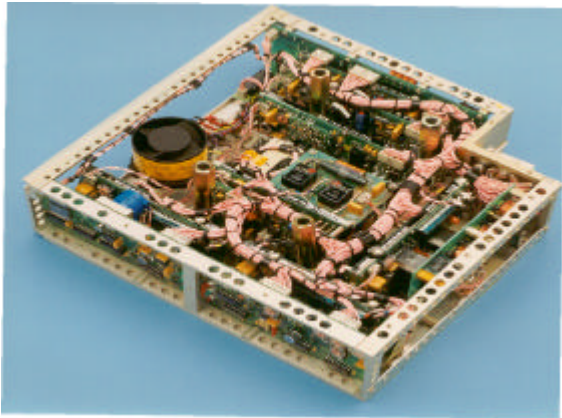

- **Lightweight.**
- **BITE Capability.**
- **Nuclear Circumvention.**
- **O/P Sequencing & Control.**

Outstanding Quality, Value and Customer Service

GENERAL SPECIFICATION

- ◆ 200 V DC 3-Phase Input.
- ◆ Multiple Outputs +5V @ 5A, 12V @ 2A, -15V @ 0.3A, +15V @ 0.3A, +26V @ 0.5A (3A Constant Current up to 5V).
- ◆ Operating Temperature Range -40°C to +85°C.
- ◆ Efficiency >74%.
- ◆ Weight <4.5Kg.
- ◆ Nuclear Circumvention & BITE Capability.
- ◆ Through-hole Technology utilised.
- ◆ Custom In-house Design - Mechanical, PCB, Electrical & Electronic.
- ◆ Dimensions: 278 x 268 x 85 (mm).

Note: All data is subject to change, and our Technical Sales Department should be consulted regarding any specific requirements

XCEL Power Systems Ltd.

Brunswick Rd, Cobbs Wood, Ashford, Kent, UK. TN23 1EH
Tel +44 (0) 1233 623404 Fax +44 (0) 1233 641777
Email: sales@xcelpower.demon.co.uk
Visit our website: www.xcelpower.com

ISO 9001 Accredited

Land Based