


## PRODUCT PROFILE

### Helicopter Mounted Custom Power Supply

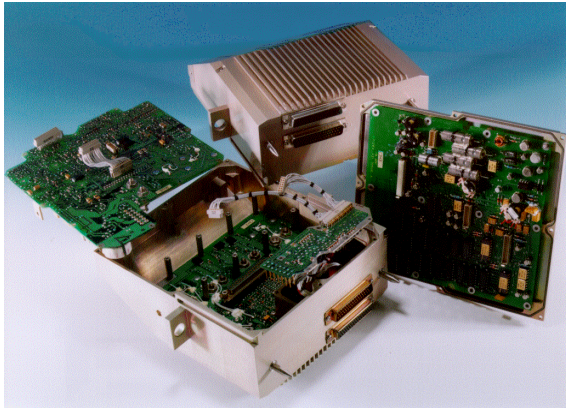

- **SMT.**
- **Efficiency >70%.**
- **Complex Sequencing Capability.**
- **BITE Capability.**

Outstanding Quality, Value and Customer Service

Airborne

### GENERAL SPECIFICATION

- ◆ 50 V DC Input.
- ◆ Multiple Outputs +5V @ 4A & 8.5A, -5.2V @ 2.6A,  $\pm 7V$  @ 0.9A, +7V @ 0.7A, -7V @ 1.2A, +15V @ 80mA, +15V @ 1.5A, -15V @ 65mA, -15V @ 1A.
- ◆ Operating Temperature Range -32°C to +40°C.
- ◆ Complex Sequencing & BITE Capability.
- ◆ Efficiency >70%.
- ◆ Weight <3Kg.
- ◆ High Peak Current Capability.
- ◆ Combined SM and Through-hole Technology.
- ◆ Designed to meet High Vibration Levels.
- ◆ Custom In-house Design - Mechanical, PCB, Electrical & Electronic.

Note: All data is subject to change, and our Technical Sales Department should be consulted regarding any specific requirements.

#### XCEL Power Systems Ltd.

Brunswick Rd, Cobbs Wood, Ashford, Kent, UK. TN23 1EH  
Tel: +44 (0) 1233 623404 Fax: +44 (0) 1233 641777  
Email: sales@xcelpower.demon.co.uk  
Visit our website: www.xcelpower.com

ISO 9001 Accredited